


**highlighted features**

**technical specification**



**WASH AND DRY TOOLS**  
RSDC-001Q-A

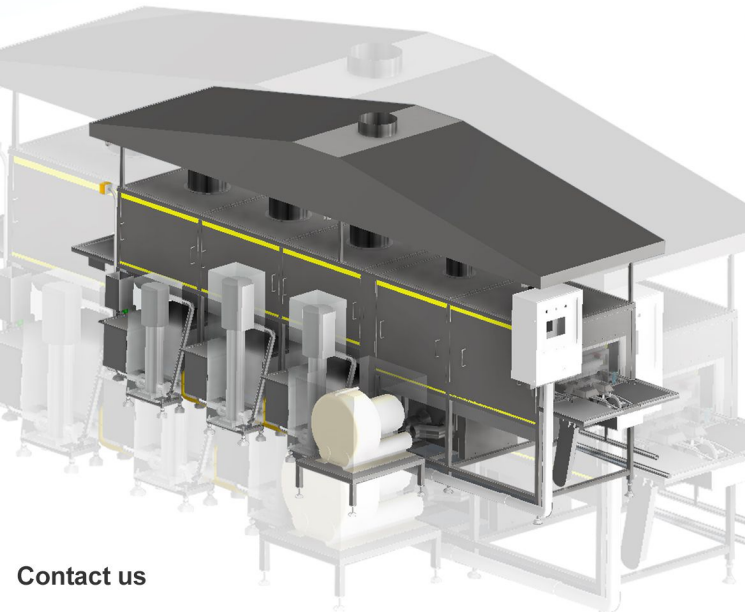

- ➔ Wash and dry tools (Such as: stainless steel, plastic, dishwasher, cup, plate, basket, etc.)
- ➔ Screen interface used to set parameters, display, monitor the operation of the machine and report errors when having problems
- ➔ The machine consists of 2 parts: Wash and Dry

Washing part:

- Box 1: Hot water and detergent used to wash away traces of leftover on tools
- Box 2: Hot water is used to remove stains on tools
- Hot water is used to clean the detergent and dry the tool

Drying section:

- Hot air blowing chamber: Used to blow water when tools in the washing chamber are released (In this air chamber, there are 2 UV lamps embedded to kill bacteria)
- Drying chamber: Used to dry the tiny water droplets remaining on the tool, the temperature can be adjusted from 100-200 degrees

Dimension	5500Lx2200Wx2500H mm
Weight	1200 Kg
Materials	SUS304
Electric power consumption	55 KW
Input Power	380V ± 10%, 3 phase
Washing speed	7 m/min, custom
Maximum time to change soap water	240 min, custom
Water temperature	20 - 100 °C, custom
Drying temperature	100 - 200 °C, custom

Contact us



**NGUYỄN THÀNH CHƯÔNG**  
Director

P: (+84) 983 772 533  
E: chuong@qcm.com.vn

